


Datasheet MSSJ-AC HD 400 SCORPION

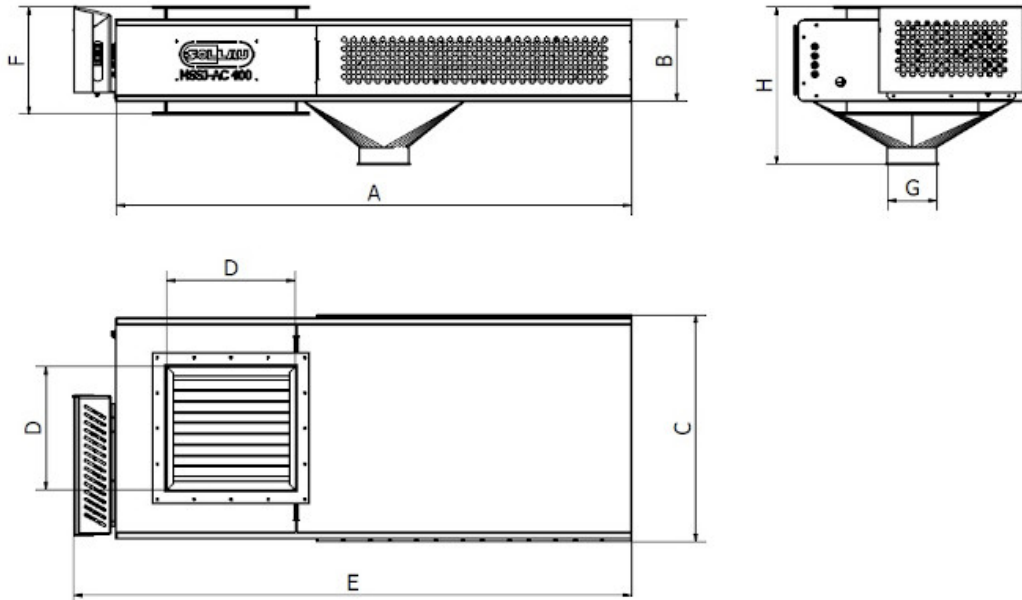

Model	Max. flow capacity (m ³ /h)	Weight (kg)	Dimensions (mm)								Distances between lower tubes (mm)	Distances between upper tubes (mm)	Number and tube diameter
			A	B	C	D	E	F	G (Ø)	H			
MSSJ-AC HD 200 SCORPION	15	90	1400	260	535	200	1530	350	150	510	32	32	5 x Ø28mm
MSSJ-AC HD 300 SCORPION	30	130	1500	260	635	300	1630	350	150	510	38	38	7 x Ø28mm
MSSJ-AC HD 400 SCORPION	55	175	1600	260	735	400	1730	350	150	510	38	38	9 x Ø28mm
MSSJ-AC HD 500 SCORPION	80	220	1700	260	835	500	1830	350	150	510	38	38	11 x Ø28mm

Parameter name	Value
Description:	Self-cleaning magnetic grate separator for interrupted operation
Separator placement:	inside of a pipeline
Application (= the material that the application of this separator is suitable for):	bulk material

Material flow direction):	vertical
Maximum effective reach of the magnetic field (mm):	40
Built-in standard magnet type:	neodymium magnet N52
Max. magnetic induction (G) on the surface of tube (+/- 10 %):	9500
Magnetic flux (G) on the magnetic core (+/- 10 %):	13500
Maximum capacity. The mentioned capacities are informative and non binding (m3/h):	55
Weight of the separator (kg):	175
Connecting dimension, inlet and outlet diameter of the separator (mm):	400
Standard connection of the separator:	square flange
Separator is suitable also even for the materials of poor bulk properties:	no
Minimum size of the particles that can be captured by the separator (mm):	0.03
Maximum size of the particles that can be captured by the separator (mm):	10
Max. operating temperature (°C):	60
Min. surrounding ambient temperature (°C):	-25
Max. surrounding ambient temperature (°C):	45
Material of the sealing:	silicone
Separator is suitable for vacuum or pressure conveying lines:	no
Separator is suitable for materials transported by:	pipeline
Separator is able to capture paramagnetic particles:	yes
Separator is suitable for abrasive materials (1 = strongly abrasive, 2 = slightly abrasive, 3 = non-abrasive):	3
Separator is suitable for materials that tend to solidify (the materials must be heated):	no
Separation of non-ferrous metals:	no
Standard requirements for the installation:	compressed air supply (of 6 - 8 bar), electricity supply (220 V, 50 Hz)
Cleaning of the separator:	automatic cleaning, but it is necessary to interrupt the material flow during the cleaning

Diameter of the outer (protective) tube of the magnetic rod (mm):	28
Diameter of magnetic rod (mm):	25
Number of magnetic tubes:	9
System tube in tube:	yes
Material of the separator body (that is in contact with the material):	DIN 1.4301
ATEX (on request):	zone 21, 22
Outer surface treatment of the separator:	sandblasted, partially painted (RAL colour tone)
Inner surface treatment of the separator:	sandblasted
Magnetic system:	magnetic tube
Degree of motor protection (against dust and water):	IP55
Standard electrical equipment of the separator:	external electric cable with a plug, METAL-WORK pneumatic cylinders, SIEMENS control system, 230 V, 1 F, 50 Hz
Options of the extended anti-abrasion protection:	chemical nickel coating, plastic coating, rubberizing, ceramic lining
Other standard parameters:	colourful touch screen, external warning beacon, setting of the cleaning interval, password setting, START/STOP/TEST, separator can be stopped and cleaned anytime , errors reported on LED display made by Siemens, sight glass
Other additionally paid options:	inner polishing
Max. operation time (hours/day):	24
Max. production time for a standard version (if not available in stock) (weeks):	8
Standard packing:	wooden box
Other packing modes (surcharged options):	maritime packing according to clients needs
Warranty (months):	12

The mentioned capacity is only approximative and depends on the type of the cleaned material. This product can be delivered also in different dimensions, in the versions with a higher temperature resistance, different magnets etc. upon a special request. The separator can be placed only horizontally.